
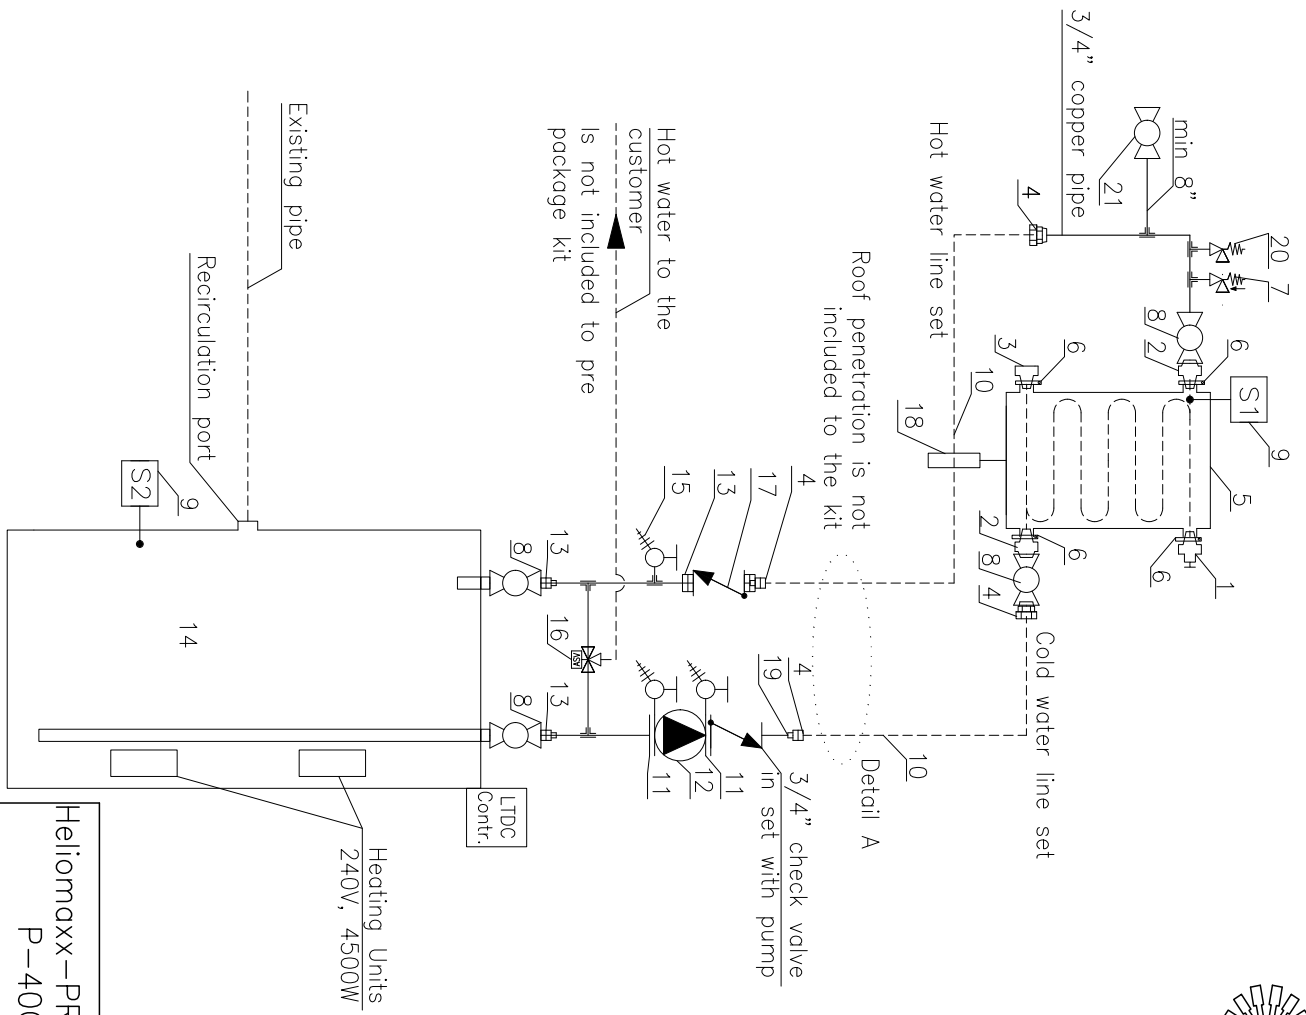


#	BOM Name	Quantity	SKU #	Quantity
1	V3 Air Bleeder	1		
2	Adapter V3 to 3/4NPT-M	2	TitanPower-A-ALDH-V3-ADPKIT-3/4NPT	1
3	End Cap	1		
4	3/4-SS Inset to 3/4NPT-M	4	FlowMaxx-A-3/4IN-3/4IN-PF-M	4
5	Solar Collector	1	TitanPowerPlus-ALDH29-V3	1
6	Clip	4	TitanPower-A-ALDH-Clip-V3	4
7	Vacuum Breaker	1	XMaxx-HW-3/4IN-VAC-Breaker	1
8	Boil Valve 3/4NPT-F	4	XMaxx-HW-3/4IN-Threaded-BV	4
9	Temperature Sensor	2	SmartMaxx-SENSOR-PT1000-HT	2
10	3/4" Line Set with Insulation	1	FlowMaxx-IDL-3/4IN-19MM-82FT	1
11	3/4" Flange	2	XMaxx-PU-UV-BFLANGE-BR-3/4IN-PRESS	2
12	Pump	1	UnMaxx-PU-WI-SS3-ZF	1
13	3/4IN Press x Male Copper Adapter	3	XMaxx-HW-PRESS-ADPT-M-3/4IN	3
14	40 Gal Storage Tank with EE and 1 Internal HX	1	StonMaxx-SE-040-1HX-EE	1
15	Boiler Drain Cook	1	XMaxx-HW-3/4IN-B-D-cock	1
16	Mixing Valve	1	XMaxx-HW-Valve-Mixing-3/4IN-Sherklike	1
17	Check Valve	1	XMaxx-HW-VALVE-3/4IN-SCV-FNPT	1
18	Large Line set Clamp	35	FlowMaxx-A-LRG-CLAMP-LINESET	35
19	3/4IN Press x Female Copper Adapter	1	XMaxx-HW-3/4IN-Press-F-ADPT	1
20	Pressure Relief Valve 30-150psi	1	XMaxx-HW-VALVE-P-30-150-125N-F	1
21	Freeze Protection Valve	1	XMaxx-HW-PP-Valve-1/2IN	1

Detail A - Optional
Roof Penetration Kit

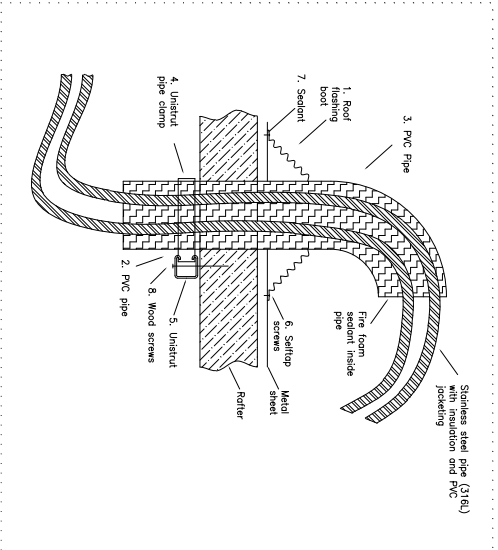

Heliomaxx-PRO-OL-30-F	
P-40G-SE	
Draw: K. Lytvak	
Corrected:	
Date: Mar, 20, 2018	
Version: 1.0	

Engineering & Submittal Questions:
 1.877.786.6299
 www.sunmaxxsolar.com



Approval Stamps

Architectural Stamps and Remarks

[Large dotted rectangular box for Architectural Stamps and Remarks]

Contractor Stamp and Remarks

[Large dotted rectangular box for Contractor Stamp and Remarks]

Contractor Note - Sign Below

[Dotted rectangular box for Contractor Note - Sign Below]

SunMaxx Solar
5098 NY 206
Bainbridge, NY 13733
P: 1.877.786.6299
F: 1.800.786.0329
www.SunMaxxSolar.com