



Product Data Sheet

Line Set Pipe Supports

Technical Details

Series:	FlowMaxx-A-N66BUV
Material	Weather Treated Nylon 6.6
Designed Use	Support of Solar Piping Line Set
Useful Life	10-20 years*
Tensile Strength	175lbs
Suitable Operating Temp	-76-185F




*Useful Life varies with application and location.

- Supports should not be in direct contact with solar piping (due to temperature thresholds).
- When using with FlowMaxx-IDL; do not overtighten support and tear insulation PVC jacket.

Available Models

Model:	Length
FlowMaxx-A-N66BUV-18IN	18"
FlowMaxx-A-N66BUV-12IN	12"

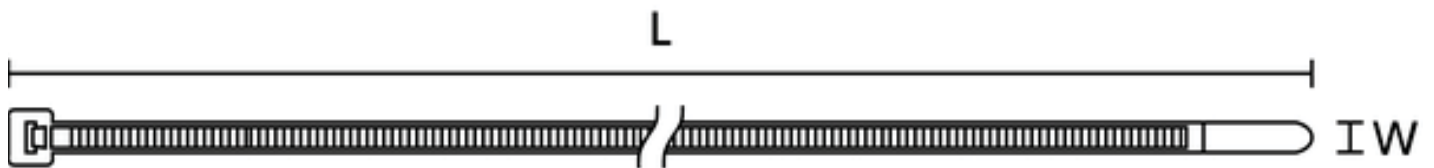

Certifications & Standards

- ASTM D 1499, ASTM G 154-04
- Tested to confirmed with UL 94 (V-2) and UL 746B

SunMaxx Solar
 5098 NY 206
 Bainbridge, NY 13733
 P: 1.877.786.6299
 F: 1.800.786.0329
www.SunMaxxSolar.com